

DFFICE OF THE MARION COUNTY SURVEYOR SECTION RECORD CORNER SECTION 24 TOWNSHIP DATE: 2-29-2000
PARTY CHIEF: Wilcoxen RANGE -CREW: _

TYPE OF MARKER: __ Harrison METHOD OF ESTABLISHMENT: ___County:

IN. S.P.C. E ZDNE, NAD 83 NAME: 17042402 N: 517876.5510(m) E: 69500.1240(m)



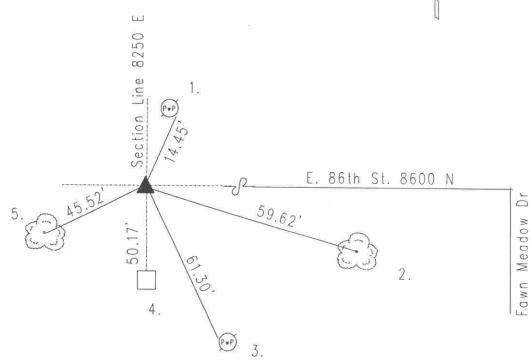

Original post set 1821 by Wm. B. Laughlin with witnesses: 12" ash S 35 E 10 links, 10" beech N 78 W 3 links per Marion County Atlas pg. Survey by Alexander Wilson 3-14&15-1854 called both witnesses still standing per Lawrence Township Legal Survey Book pg. 1. 10-5-59 called for a steel pin as monument. 3-24-76 called for a railroad spike. Excavated 7-30-86, and an 2" iron pipe 18" long found 18" down, after probing around 3' hole, no stone was found. Set Harrison. Re-tied 2-29-2000 by Wilcoxen.

HC742402

REF.	DISTANCE	DESCRIPTION
1.	14.45'	PK nail E PwP#178-220 12"up
2,	59.62	Mag nail W spur root of 30" ash
3.	61.30'	Mag nail w/brass washer W PwP#183-220B 12"up
4.	50.17'	Due S to 4"x4" subdivision monument
5	45.52'	Mag nail w/brass washer S 15" ash 12"up